


Nokia ONT Wi-Fi Settings

Step by step guide on how to connect to your fibre service:

- As soon as the Link and Authentication lights on the router are solid green, the fibre service is active.
- Once a service is activated, it is considered 'live' and ready to use immediately. Note: you may connect wirelessly or via a network (LAN) cable.

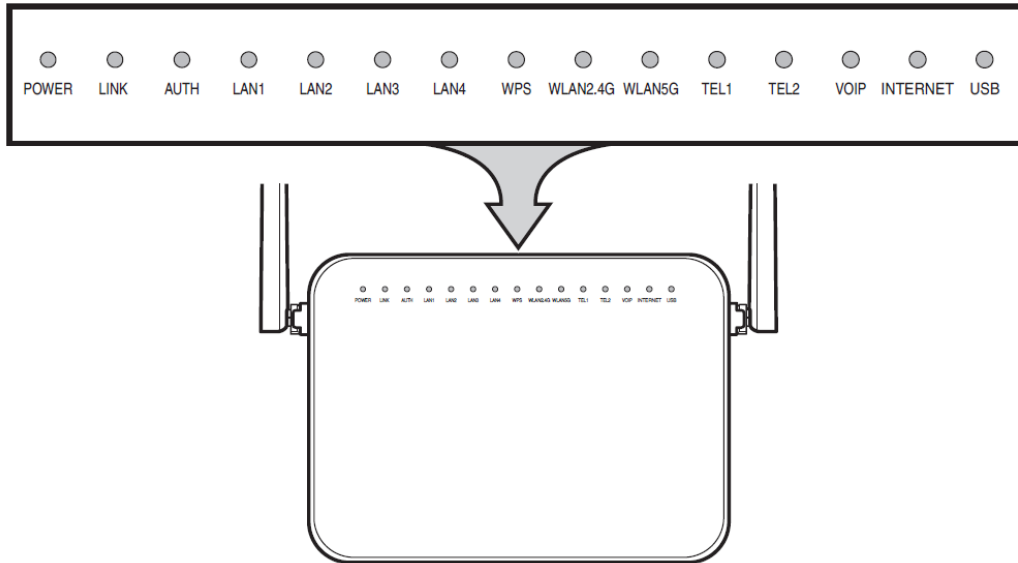

All information required to connect to the network is provided on the white label at the back of the router (ONT). This includes:

- **SSID** – default wireless network name
- **WiFi Key** – default wireless password



Illustration 1

How to connect wirelessly to your computer or laptop:

Step 1: On the bottom right of your Taskbar, click on the connection's icon next to the date and time.




Step 2: A list of available Wi-Fi networks will open. Search for your unique network name (SSID), starting with ALHN, found on the white sticker at the back of your router as per illustration 1 on page 1, and click Connect.



Step 3: After clicking Connect, you will be prompted to enter the network security key/Wi-Fi password. Enter the Wi-Fi Key, found on the white sticker at the back of your router, and click Next.




Once the connection is successful, a message will display saying “Connected, secured”.

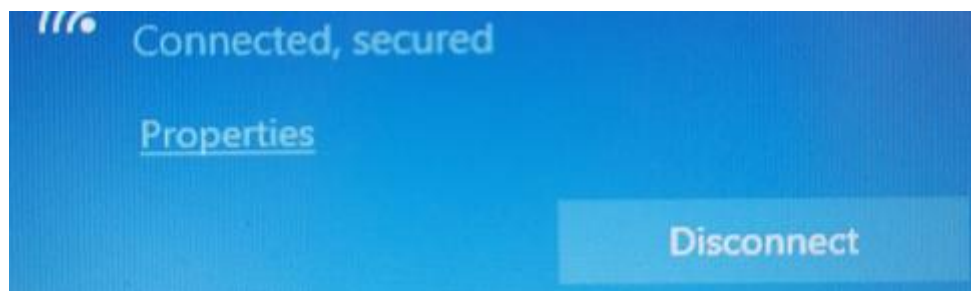


You can now start browsing the internet and enjoy your MetroFibre service.

How to connect wirelessly to your cell phone:


Step 1: Go to your cell phone's Settings and search for the Connections option and then select the Wi-Fi option.

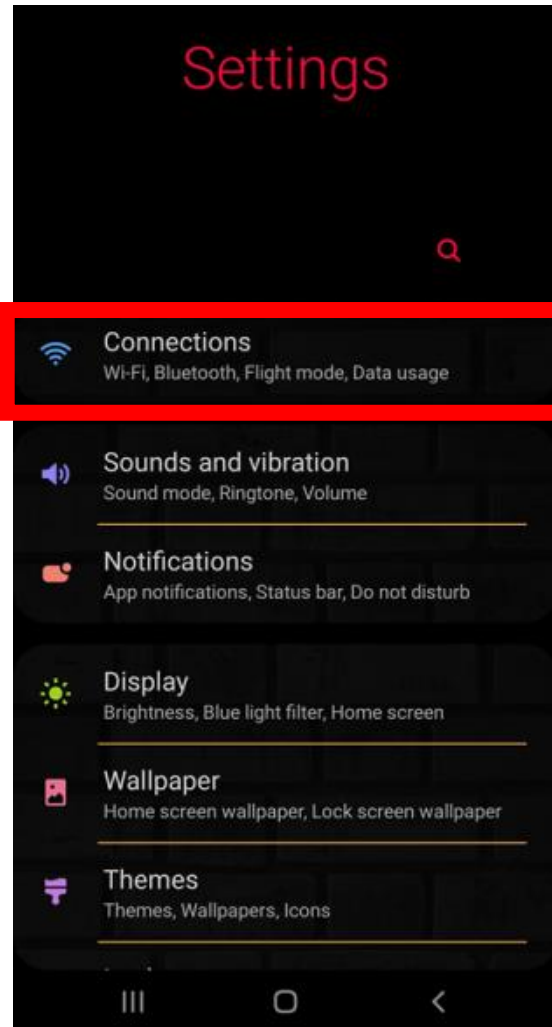

Step 2: Switch the Wi-Fi on and select your unique network name (SSID), starting with ALHN, found on the white sticker at the back of your router, under Available networks.

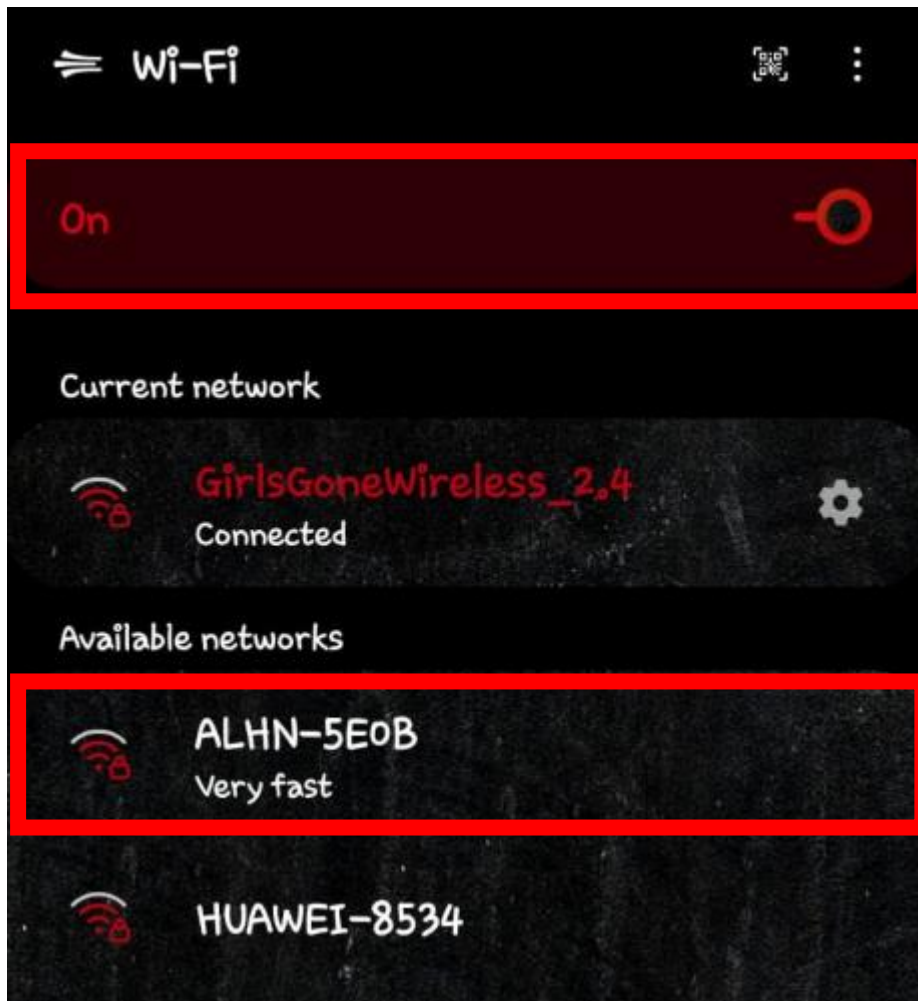

Step 3: Next you will be prompted to enter the network security key/Wi-Fi password. Enter the WiFi Key, found on the white sticker on the bottom of the router and click Connect.

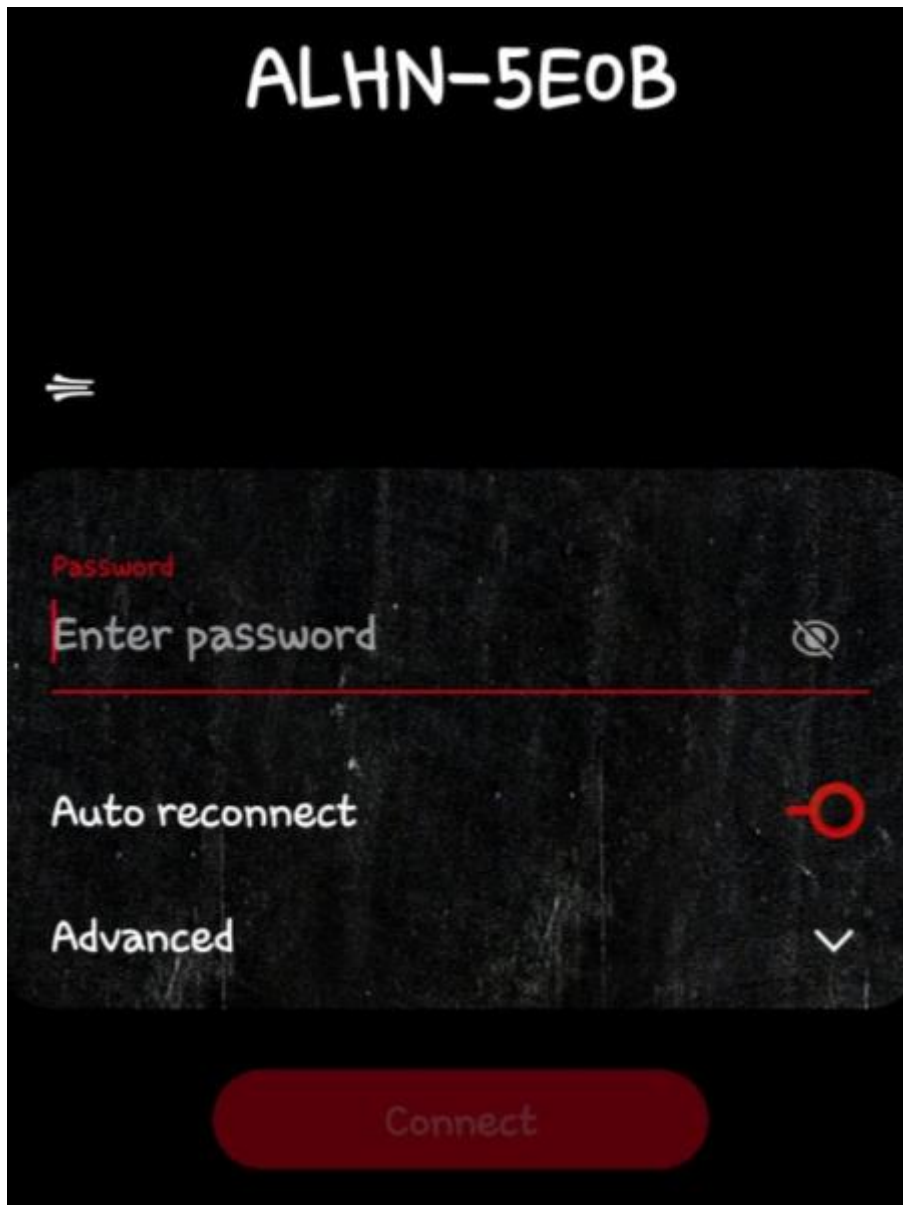

You can now start browsing the internet and enjoy your MetroFibre service.

How to change/personalize your Wi-Fi name and password:

Step 1: With the router connected to your PC (for this step a LAN connection is preferred), open a browser and enter the admin IP found on the white sticker on the bottom of your router into the address bar and then press enter.



Step 2: The Login page will open and prompt for a Username and Password.




GPON Home Gateway Login

Username


Password

Enter the Username and Password credentials found on the sticker of your router and click on the Login button.

Step 3: On the Home Gateway Page click on the Network dropdown and select WiFi:

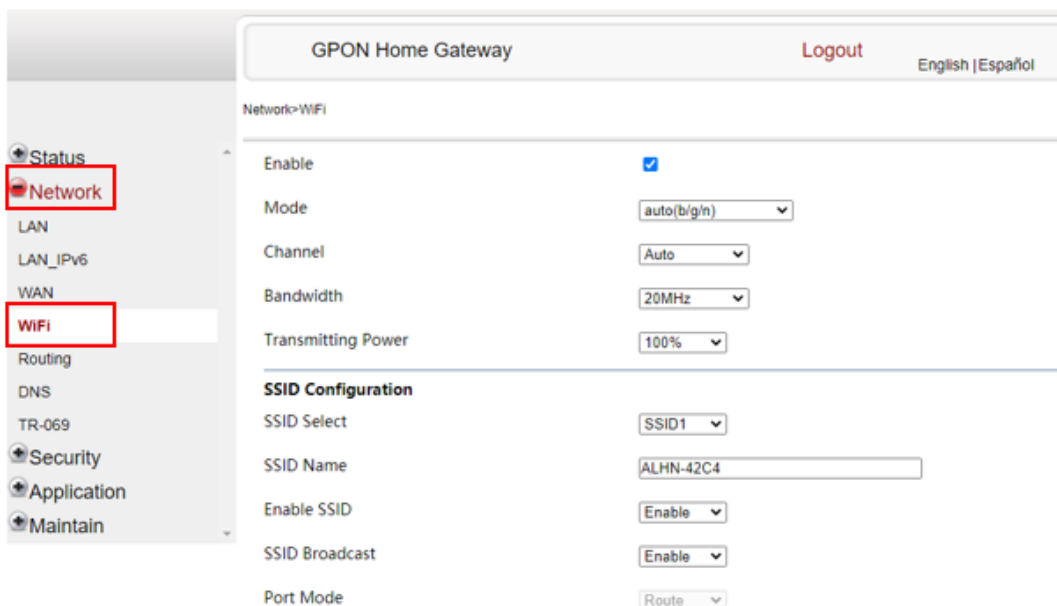

Step 4: enter your new Wi-Fi network next to SSID Name and new password next to WPA Key then click Save.

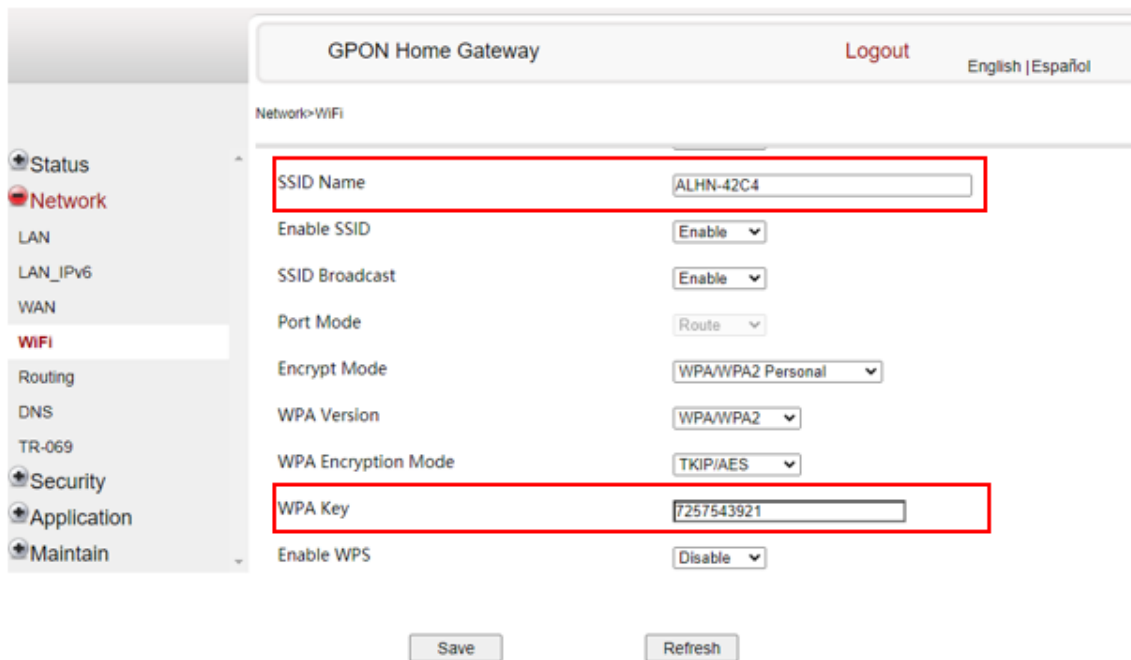

The screenshot shows the configuration interface for a GPON Home Gateway. The page title is "GPON Home Gateway" with a "Logout" link and language options "English | Español". The left sidebar contains navigation links: Status, Network (selected), LAN, LAN_IPv6, WAN, WIFI (highlighted), Routing, DNS, TR-069, Security, Application, and Maintain. The main content area is titled "Network > WiFi" and contains the following settings:

SSID Name	ALHN-42C4
Enable SSID	Enable
SSID Broadcast	Enable
Port Mode	Route
Encrypt Mode	WPA/WPA2 Personal
WPA Version	WPA/WPA2
WPA Encryption Mode	TKIP/AES
WPA Key	7257543921
Enable WPS	Disable

At the bottom of the configuration area are "Save" and "Refresh" buttons.

Please note: You will need to reconnect any devices that were previously connected via Wi-Fi using the new credentials you created.

For any assistance kindly contact our Support team on 087 151 4000 or send an e-mail to sales.support@metrofibre.co.za.